


INDEX	MDSL0051-07
REV. LEVEL	3
SHEET	1 OF 1

TOSHIBA/HOUSTON

DRIP-PROOF
HORIZONTAL FOOT-MOUNTED

Fr. 364T-365T
Fr. 364TS-365TS

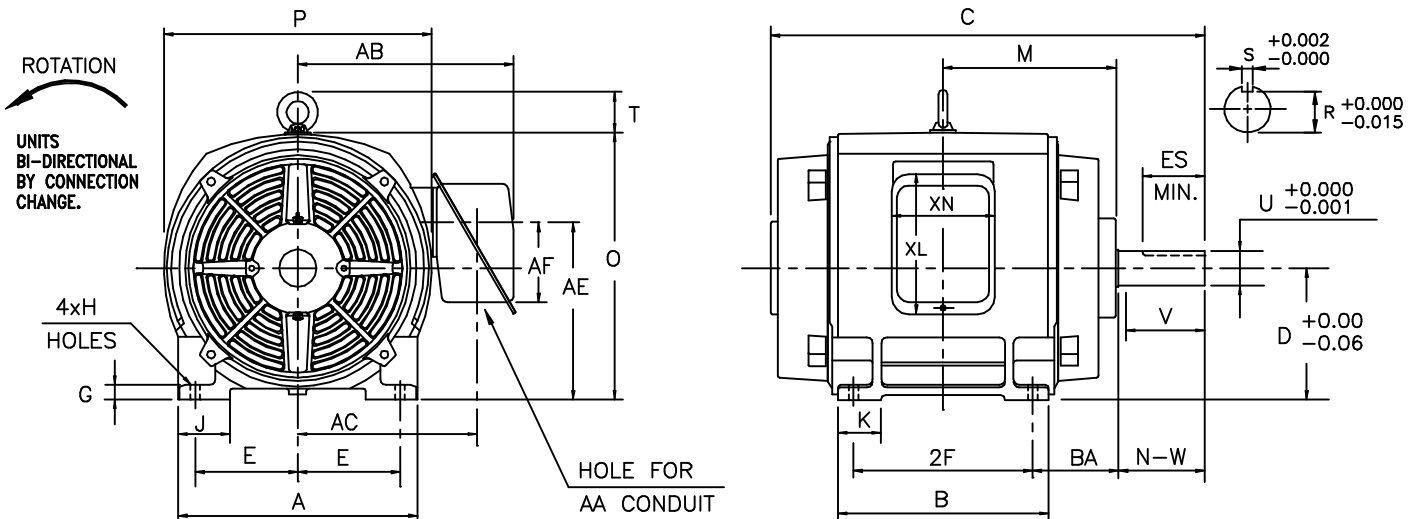

FRAME SIZE	MOUNTING				CONDUIT BOX						
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN
364T/TS	7.00	11.25	0.66	5.88	3.00	14.75	12.26	12.15	5.51	9.59	7.05
365T/TS	7.00	12.25	0.66	5.88	3.00	14.75	12.26	12.15	5.51	9.59	7.05

FRAME SIZE	MOTOR DIMENSIONS										
	A	B	C	D	G	J	K	M	O	P	T
364T	16.38	13.39	28.695	9.00	1.00	3.54	2.95	11.31	18.25	18.31	2.88
364TS	16.38	13.39	26.565	9.00	1.00	3.54	2.95	11.31	18.25	18.31	2.88
365T	16.38	14.41	29.675	9.00	1.00	3.54	2.95	11.79	18.25	18.31	2.88
365TS	16.38	14.41	27.545	9.00	1.00	3.54	2.95	11.79	18.25	18.31	2.88

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
364T	5.88	5.63	2.375	2.021	0.625	4.28	6314C3	6313C3	681 lbs.
364TS	3.75	3.50	1.875	1.591	0.500	2.03	6313C3	6313C3	640 lbs.
365T	5.88	5.63	2.375	2.021	0.625	4.28	6314C3	6313C3	720 lbs.
365TS	3.75	3.50	1.875	1.591	0.500	2.03	6313C3	6313C3	699 lbs.

NOTES:

- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
- CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
- "T" KEY DIMENSIONS EQUAL S x S x 4.25
"TS" KEY DIMENSIONS EQUAL S x S x 2.00 (MOTOR SUPPLIED WITH KEY)
- MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____
 MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____
 HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____
 FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____
 REMARKS: _____

PER: _____ ISSUE DATE: _____ SUPERSEDES: _____