


INDEX	MDSL0042-03
REV. LEVEL	1
SHEET	1 OF 1

**EXPLOSION PROOF
TOSHIBA/HOUSTON HORIZONTAL FOOT-MOUNTED
F-2 ASSEMBLY**

HAZARDOUS LOCATION Fr. 213T-215T
CLASS I GROUP D
CLASS II GROUP E, F, AND G

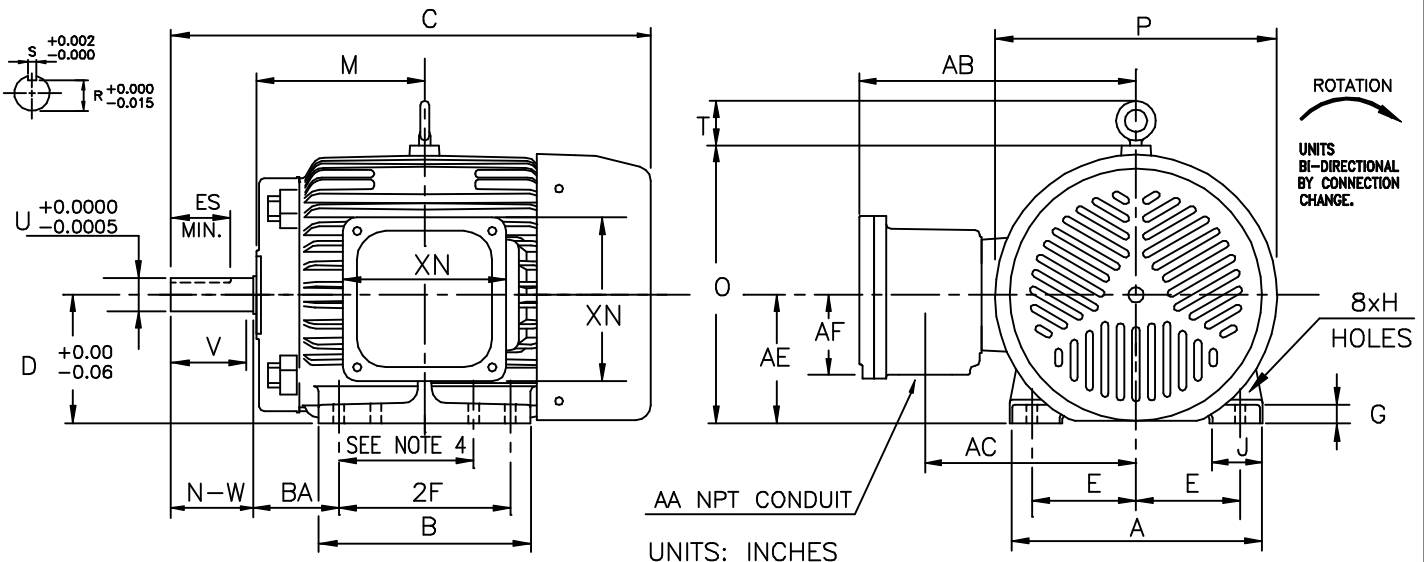

FRAME SIZE	MOUNTING				CONDUIT BOX						
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN
213T	4.25	5.50	0.44	3.50	1.00	11.3	8.6	5.25	3.3	6.7	6.7
215T	4.25	7.00	0.44	3.50	1.00	11.3	8.6	5.25	3.3	6.7	6.7

FRAME SIZE	MOTOR DIMENSIONS									
	A	B	C	D	G	J	M	O	P	T
213T/215T	10.3	8.7	19.8	5.25	0.8	2.2	6.3	11.1	11.5	1.8

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
213T/215T	3.38	3.28	1.375	1.201	0.312	2.41	6308UU	6308UU	202 lbs.

NOTES:

- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT
- CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
- KEY DIMENSIONS EQUAL S x S x 2.38 (MOTOR SUPPLIED WITH KEY)
- DIMENSIONS FOR 213T MOUNTING EQUAL (2F) LOCATED IN 213T SIDE VIEW.
- MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____

MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____

HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____

FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____

REMARKS: _____

PER: _____ ISSUE DATE: _____ SUPERSEDES: _____