


INDEX	MDSL0051-06
REV. LEVEL	4
SHEET	1 OF 1

TOSHIBA/HOUSTON

DRIP-PROOF
HORIZONTAL FOOT-MOUNTED

Fr. 324T-326T
Fr. 324TS-326TS

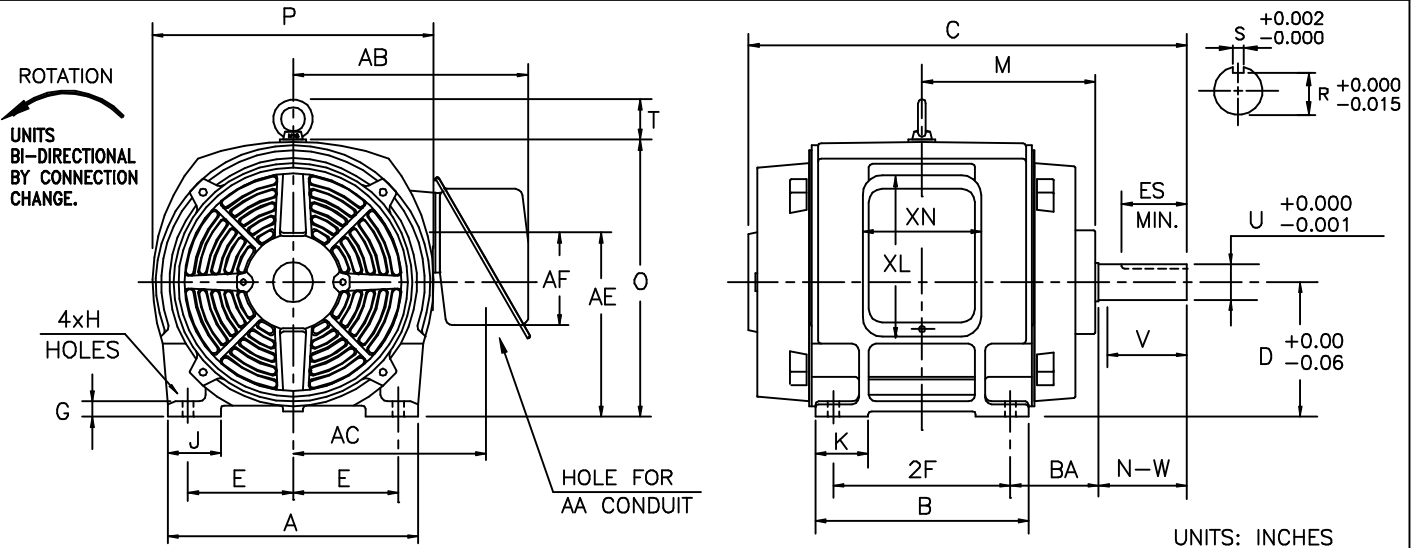

UNITS: INCHES

FRAME SIZE	MOUNTING				CONDUIT BOX						
	E	2F	H	BA	AA	AB	AC	AE	AF	XL	XN
324T/TS	6.25	10.50	0.66	5.25	2.00	13.96	11.47	10.95	5.51	9.59	7.05
326T/TS	6.25	12.00	0.66	5.25	2.00	13.96	11.47	10.95	5.51	9.59	7.05

FRAME SIZE	MOTOR DIMENSIONS										
	A	B	C	D	G	J	K	M	O	P	T
324T	14.88	12.68	26.1	8.00	0.91	3.15	3.15	10.30	16.46	16.69	2.38
324TS	14.88	12.68	24.6	8.00	0.91	3.15	3.15	10.30	16.46	16.69	2.38
326T	14.88	14.17	27.5	8.00	0.91	3.15	3.15	11.04	16.46	16.69	2.38
326TS	14.88	14.17	26.0	8.00	0.91	3.15	3.15	11.04	16.46	16.69	2.38

FRAME SIZE	SHAFT EXTENSION			KEY SEAT			BEARINGS		MAXIMUM WEIGHT
	N-W	V	U	R	S	ES	LS	OS	
324T	5.25	5.00	2.125	1.845	0.500	3.91	6313ZZC3	6312ZZC3	516 lbs.
324TS	3.75	3.50	1.875	1.591	0.500	2.03	6312C3	6312C3	512 lbs.
326T	5.25	5.00	2.125	1.845	0.500	3.91	6313ZZC3	6312ZZC3	560 lbs.
326TS	3.75	3.50	1.875	1.591	0.500	2.03	6312C3	6312C3	565 lbs.

ALL DATA SUBJECT TO CHANGE WITHOUT NOTICE.
FOR CONSTRUCTION USE ONLY CERTIFIED DATA.

CERTIFIED DATA

- NOTES:
- DIMENSION V REPRESENTS LENGTH OF STRAIGHT PART OF SHAFT.
 - CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS AND MAY BE MOUNTED ON OPPOSITE SIDE ON SPECIAL ORDER.
 - "T" KEY DIMENSIONS EQUAL S x S x 3.88
"TS" KEY DIMENSIONS EQUAL S x S x 2.00 (MOTOR SUPPLIED WITH KEY)
 - MOTOR WEIGHT SHOWN IS MAXIMUM HORSEPOWER IN FRAME.

CUSTOMER: _____ P.O. NO.: _____ TAG NO.: _____
 MOTOR MODEL NO.: _____ TOSHIBA FILE NO.: _____
 HP: _____ RPM (SYN.): _____ VOLTAGE: _____ Hz: _____
 FRAME SIZE: _____ LOG NO.: _____ LOG REV. LEVEL: _____
 REMARKS: _____

PER: _____ ISSUE DATE: _____ SUPERSEDES: _____